


THE "LUCY"


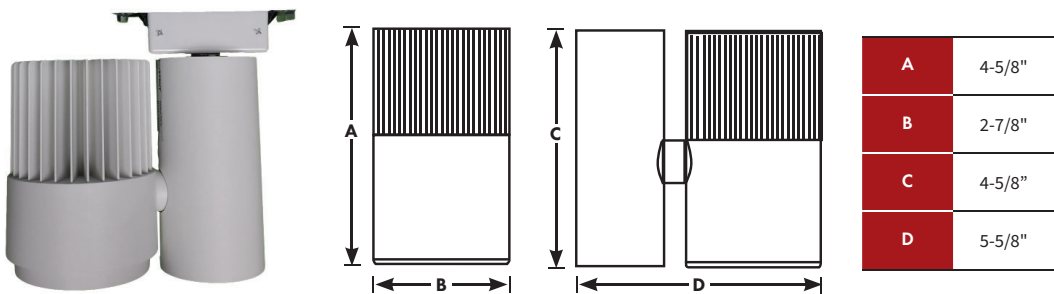


FEATURES

- Beautifully constructed with high quality architectural grade die-cast aluminum
- Precision optics are uniquely constructed to intentionally regress the position of the LED array for glare control.
- Multiple accessories are also available for further glare control.


busSTRUT	VOLTAGE	TECH	KELVIN TEMP (CCT)	Color Rendering Index (CRI)	DELIVERED LUMENS	WATTS	LM/W	BEAM ANGLE	FINISH (F)	OPTION CODES (OC)	CATALOG NUMBER
20A	120/277V	LED	3000K	90+	3,050	30	101	24	GR=GREY BL=BLACK WH=WHITE	SN=Snoot HL=Honeycomb Louver	BR-LUCY-U-309-30-U-(F)-(OC)

CANDLEPOWER

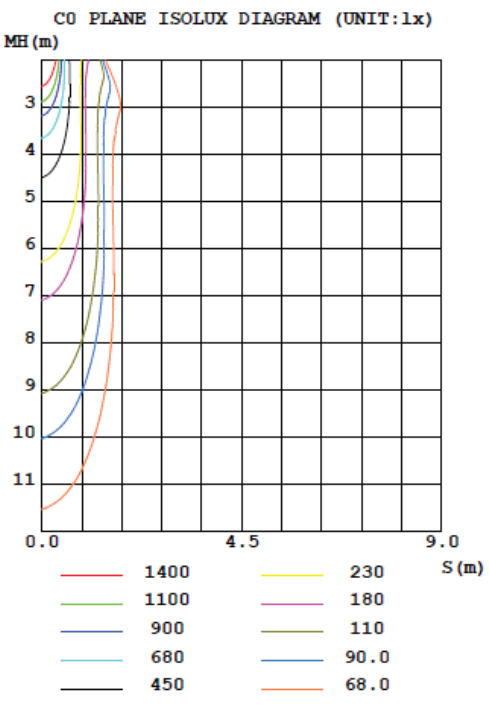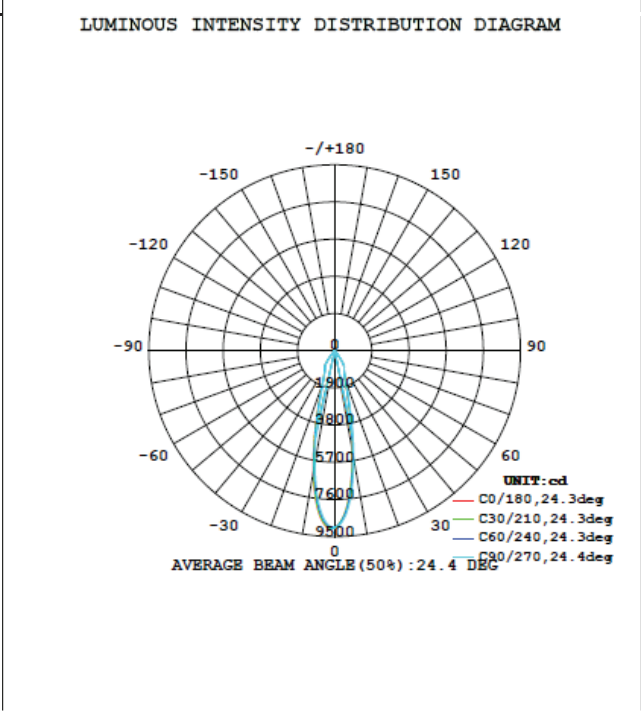


OPTIONS TO FURTHER REDUCE GLARE:

SNOOT
(FINISH TO MATCH)




HONEYCOMB
LOUVER



TYPE	Fixture				LED SYSTEM				Ballasts		Louver Color	Mnt Kit Color	Option Codes	Finishes	Catalog Number
	busSTRUT	Type	Length	Delivered Lumens	Type	No.	Lumens	Watts	No.	Voltage	(LC)	(MK)	(OC)	(F)	
LED LWseries LOUVER WALLWASH Adjustable	BR	LED	4'	4533	LED	2	6000	52	1	Universal 120/277	WH = White	WH = White	L3 = 3000K or L4 = 4000K	WH = White	BR-LED4-4K-U-WH-WH-L3-WH or BR-LED4-4K-U-WH-WH-L4-WH

CROSS SECTION


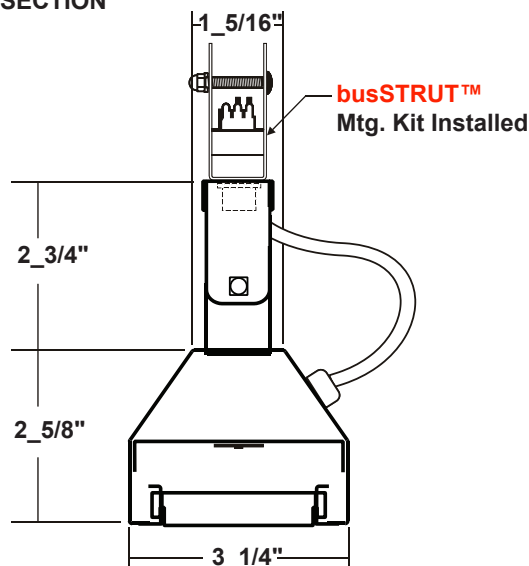


Series
Number
LW

Lamps
Qty
1

Type
LED

Nominal
Length
4'

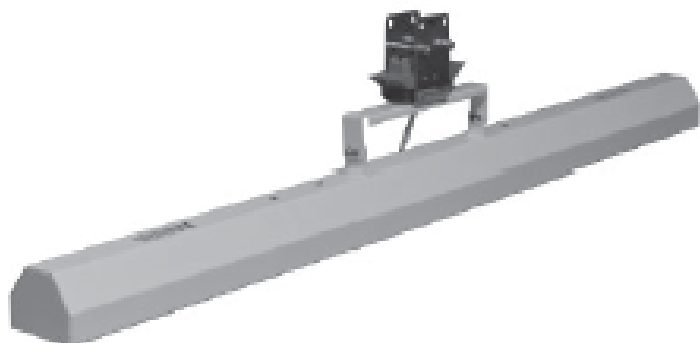

Type:

- Extruded powder coated aluminum LED track fixture incorporating a LED. Integral electronic driver provides efficient and quiet power.
- 5/8" louver provides optimum performance and cut off for increased aesthetics and light control.

Features:

- Heavy duty extruded aluminum body
- Low profile, aesthetic design
- Integral 5/8" Louver
- High-strength stainless steel electrical contacts

Finish:

- Powder coated finish

Reflector:



- 0.020 aluminum polished to mirror quality clear specularly.

Driver:

- 120V/277V 50/60 Hz input
- Class 2 power supply
- Over voltage, over current and short protection: Auto recovery
- MTBF > 100,000
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended.



FEATURES

- 22 Ga. cold rolled steel housing. End plates are fastened to housing by sheet metal screws to assure rigidity
- High efficiency driver coupled with long-life LEDs, service life greater than 50,000 hours (L70).
- Directly mounted and powered to arrive busSTRUT READY with factory installed plug & play mounting kit.

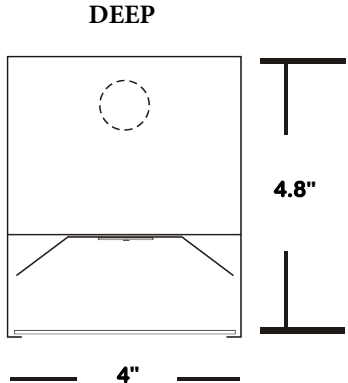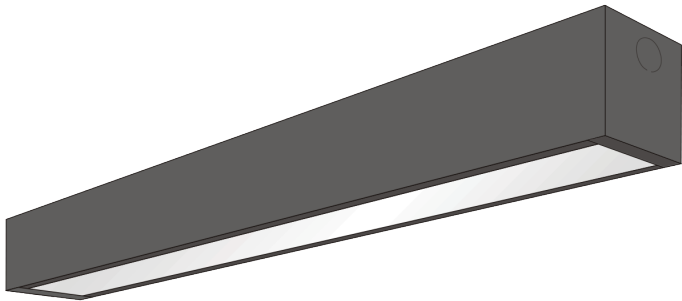

BACK PLATE

- 0.875" Dia. K.O. for busSTRUT™ 30" Whip
- 1/4 Dia. Hole for mounting

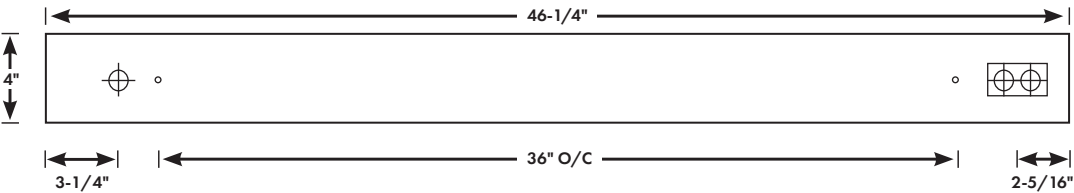

busSTRUT	TYPE	LENGTH	LUMENS	CCT/CRI	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FINISH	CATALOG NUMBER
BR	DEEP	4'	3,000	3,000/80+	2,385 LM	24.64W	96.79 LPW	White (W)	BRL-4-20L-30K80-ST-WD-W
	SLIM								BRL-2-20L-30K80-ST-WDM-W