
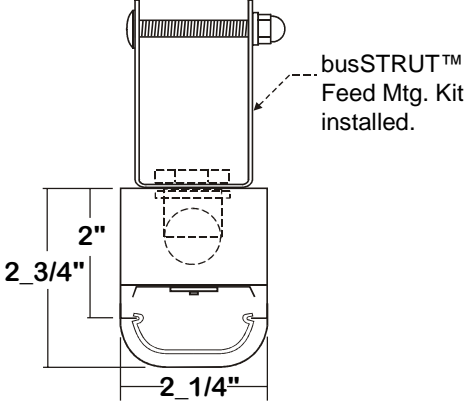


CUSTOMER SUBMITTAL SHEET

ITEM # LCD1626	DESCRIPTION LED Strip With Diffuser	DATE
JOB NAME	DESIGNED FOR *	APPROVED BY




CROSS SECTION



busSTRUT™
Feed Mtg. Kit
installed.

BACKPLATE

☒ busSTRUT™ Invisible Feed Mounting Kit

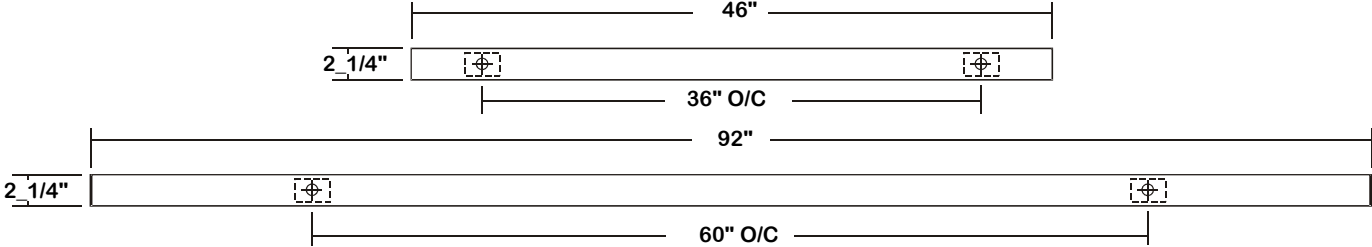

1. TYPE : LED strip with diffuser.
2. CONSTRUCTION : 22 Ga. cold rolled steel welded housing.
3. FINISH : Baked powder coated finish, painted after fabrication.
W - Sky white (DuPont® PFW665S9)
G - Camaro silver (DuPont® UFA402M9)
B - Matte black (DuPont® UFB634S2)
4. OPTICAL : FRWA - Frosted white acrylic lens.
5. LUMEN PACKAGE : 3K - Nominal 3000 lumens LED system.
6K - Nominal 6000 lumens LED system.
6. VOLTAGE : UNV - Universal voltage 120v thru 277v.
7. CRI/CCT : 835 - 80+ CRI, 3500k color temperature.
8. LED SYSTEM : High efficiency driver coupled with long-life LEDs, service life greater than 50,000 hours (L70).

Fixture Length	Lumen Package	CRI / CCT	Delivered Lumens	System Watts	Luminaire Efficacy
4'	3K	835	2581.7 LM	24.35 W	106.01 LPW
8'	6K	835	4895.3 LM	45.76 W	106.97 LPW

Note: System data above are based on 120V input voltage.

9. FEEDER : SFW(1CIR) - Single-height feeders, one set of busSTRUT™ one circuit pre-wired fitters installed, mounting kit supplied. (#LF20-2-20-UNIV-WD-W-M)
SFW(1CIR)U - Single-height feeders, one set of busSTRUT™ one circuit pre-wired fitters installed, Non-powered Feeder(NPF) side has a plastic insert inside the bracket for upright applications, mounting kit supplied by customer. (#LF20-2-20-UNIV-WD-W-M-NPF)

10. CATALOG NUMBER :

LCD1626-3-4L-(COLOR)-FRWA-SFW(1CIR)U-1DRDM-UNV-1/835
 LCD1626-6-8L-(COLOR)-FRWA-SFW(1CIR)-1DRDM-UNV-1/835